



EARTH CONNECTION TESTER



APPLICAZIONI

- VERIFICA DELLA CONTINUITA' DEL FILO DI TERRA
- CORRENTE DI TEST SELEZIONABILE 10 O 25 A
- SOGLIA BUONO/SCARTO IMPOSTABILE DA 0 A 0.8 OHM
- PROVE MANUALI O AUTOMATICHE


APPLICATIONS

- EARTH WIRE CONTINUITY TEST
- TEST CURRENT SELECTABLE 10 OR 25 A
- GOOD/NO GOOD THRESHOLD SELECTABLE FROM 0 TO 0.8 OHM
- MANUAL OR AUTOMATIC TEST

2015

TYPE	EARTH CONNECTION TESTER	
DATASHEET		
Input Voltage	230 Vac 50/60 Hz	
Current test	10 or 25 A	
Range resistor measure	0,01 ÷ 0.8 Ohm	
Measure accuracy	±0.5% f.s.	
Test time	0.5 ÷ 5 sec	
Operating temperature range	0÷50°C	
Humidity	90% max whitout condensation	
MECHANICAL FEATURE		
Dimension	H x W x D	125x438x330 mm
Frontal plate dimension	TH x W x L	3x134x483 mm [rack 19” 3U]
Weight	12 kg	

Graphic touch screen with
simple and intuitive
menu-driven operators controls

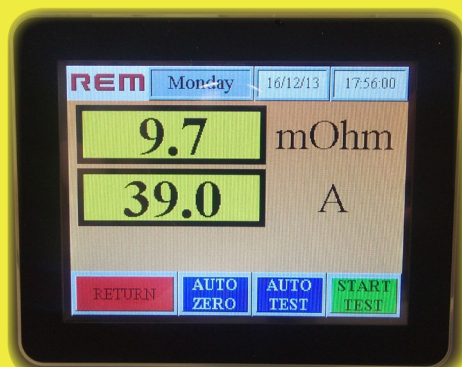

Flexible communication for:
supervision, transfer parameters,
results, curves, statistics

USB



ETHERNET



REM ELECTRA dei F.lli ROCCA & C. s.n.c
Sede Operativa ed Amministrazione:
Via Emilia 2/a - 35043 Monselice (PD)
Tel. +39 0429 783479 Fax +39 0429 789733
Cod. Fisc. e P.I.: 01777910280
E-mail: info@remelectra.it www.remelectra.it